


SYNMEC
森迈国际 农业机械

PRODUCT CATALOGUE

Seed Cleaning & Bag Packing Machinery

Seed cleaner · Bag closing machines · Sealing machine · Filling machine

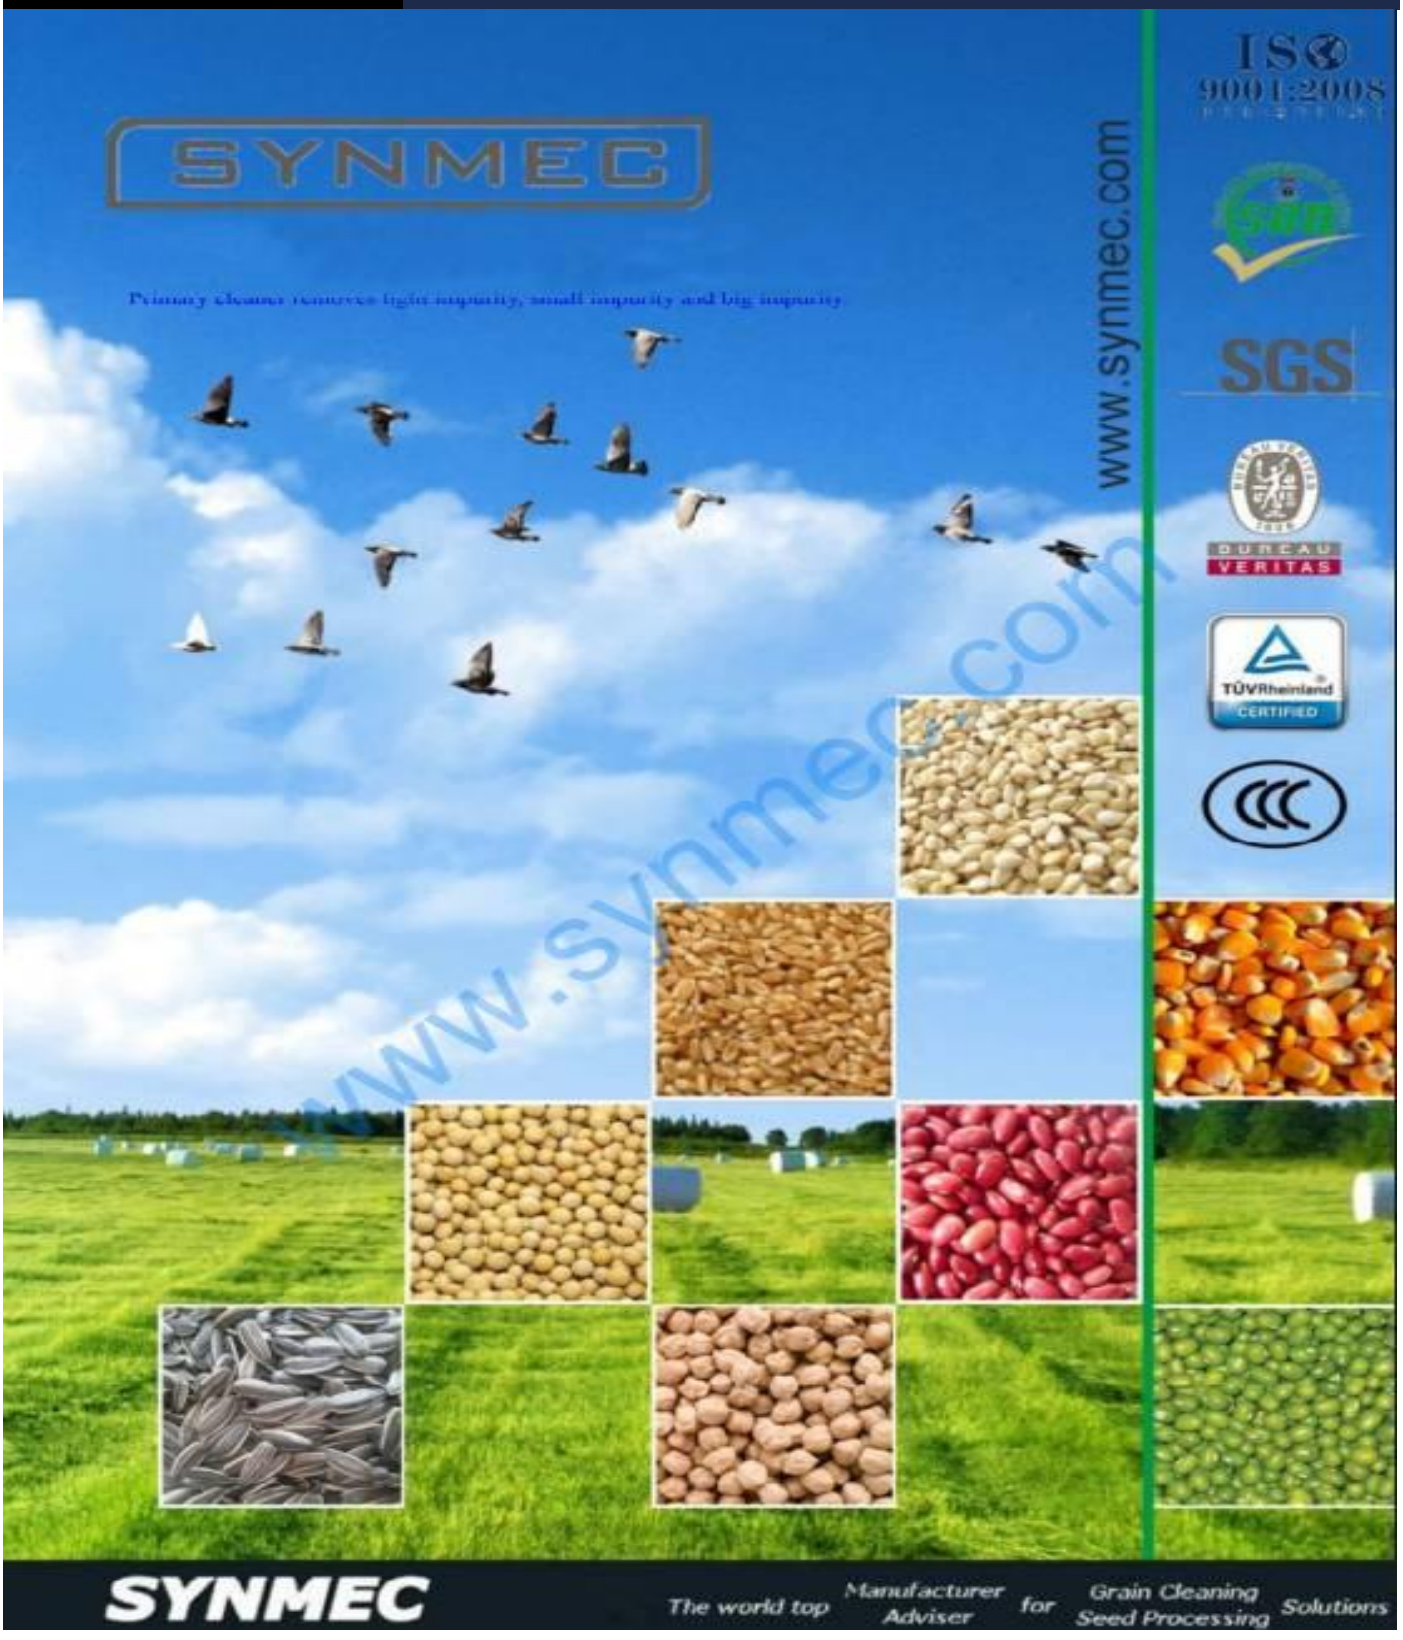


GK9

Portable High-Speed Electric Bag Closing Machine

手持高速电动封包机（单针双线） · Single Needle, Double Thread

GK9
PRODUCT





STITCH PATTERN · FRONT / BACK
线迹 正面 / 反面

PRODUCT DESCRIPTION 产品特点

This model is an efficient portable plug-in single-needle double-thread bag closing machine. It adopts double-thread chain stitch and double-thread edge locking to form a high-strength chain structure, with tensile resistance increased by 200%. While remaining lightweight and flexible, it greatly improves sealing strength and tightness. The stitching is neat and avoids stitch skipping. It is suitable for applications with high requirements for bag seam firmness and leak-proof performance.

该机型是高效手提插电式单针双线封包设备，为一条双链式线迹，双线锁边，形成强力链式结构，抗拉力提升 200%，在保持轻使灵活的基础上，大帽提升封口强度与密封性。既美观又防跳线。适合对袋口牢固度和防漏性有较高要求的场景。

APPLICATION 适用范围

This machine is widely used in industries including flour, fertilizer, feed, chemical, mining, ports and terminals, logistics and warehousing. It can sew kraft paper bags, gunny sacks, woven bags, paper bags, laminated bags, geotextile bags and other packing bags. The machine is equipped with a double-thread chain-stitch sewing mechanism, safe plastic handle, cast aluminum alloy body, automatic and manual thread trimming system, and a durable steel cam.

该机可广泛应用于面粉、化肥、饲料、化工、矿山、港口、码头、物流仓储等行业，能缝合牛皮袋、麻袋、编织袋、纸袋、复合袋、土工布等打包袋。设备配备双线链式缝缝机构、安全塑料手柄、铸铝合金机身、自动 / 手动剪线系统以及耐用钢制凸轮。

GK9 Specification 参数

ITEM 项目	SPECIFICATION 参数
Model 型号	GK9
Housing Material 机体材质	Aluminum Alloy 铝合金
Power Cable Material 电源线材质	Copper 铜
Needle 机针型号	9x230 (230/26)
Timing Belt 同步带型号	152XL
Motor Voltage 马达电压	220V or 110V, 50Hz
Motor Power 马达功率	190 W
Stitch Type 线迹	Double Chain Stitch 一条双链式
Stitch Length 针距	7–9 mm
Sewing Thickness 缝纫厚度	0.2–8 mm (compressed thickness ≤ 2.5 mm, equivalent to 1–6 layers of woven bags) 0.2-8mm（压紧厚度≤2.5mm，相当于 1-6 层编织袋）
Motor Speed 马达转速	9000 rpm (AC) 9000 转/分（交流电）
Sewing Speed 缝纫速度	1800 stitches/min
Net / Gross Weight 净/毛重	6 kg
Revolution Speed 转速	1600 RPM
Needle Dimensions 针头尺寸	390 × 275 × 365 mm

Why Choose Us











SYNMEC

20+Years Manufacturing Experience, Trustworthy Supplier



Packaging and Shipping



Warehouses



Packing



Loading



Deliver goods











Buy with assurance Reliable after-sales support

